


# ENERGIZER CR2450

# Lithium Coin



## Industry Standard Dimensions

mm (inches)

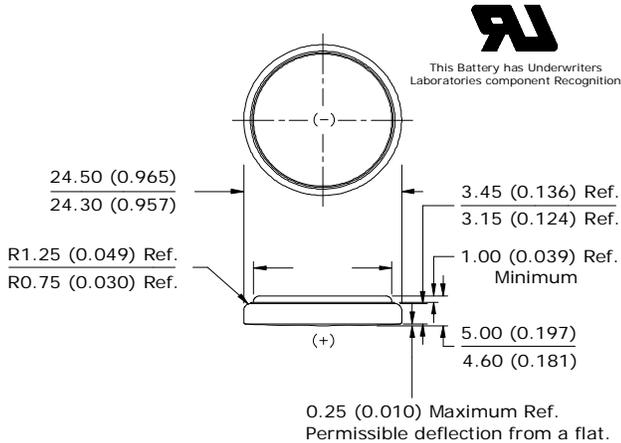


## Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.9V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.39	7,500	1,590

## Typical Discharge Characteristics

Load: 7.5K ohms - Continuous  
Typical Drain @ 2.9V: 0.39 mA

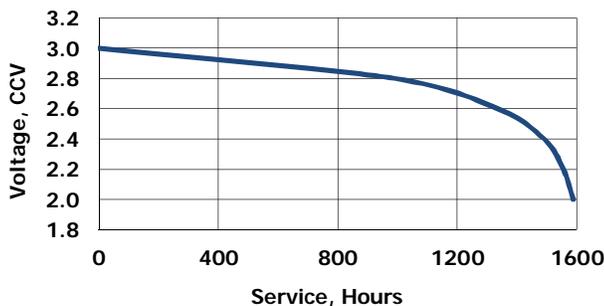


## Internal Resistance Characteristics

Pulse Test at 21°C (70°F)

**Bkgnd Drain:** Continuous  
7.5K ohms  
0.39 mA @ 2.9V

**Pulse Drain:** 2 seconds X 12 times/day  
300 ohms  
9.0 mA @ 2.7V

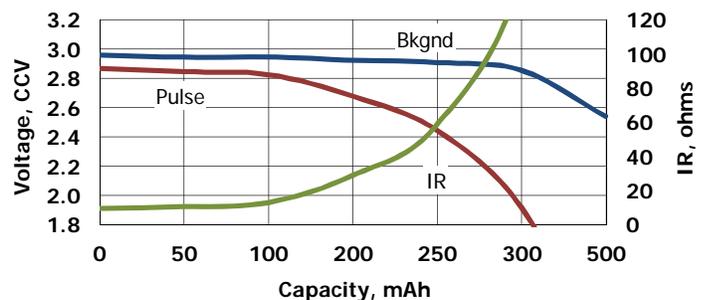

## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.