


FOLOMOV

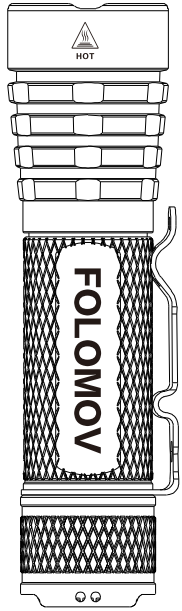

1020
LUMENS

18650M

产品特性


- 1、长度120毫米，净重95g。体积小、重量轻，适合日常携带、户外活动及军警执勤。
- 2、采用高强度航空级铝材制造，三级硬阳极氧化表面处理。
- 3、使用CREE XP-P LED，寿命长达50000小时。
- 4、最大输出为1020流明，最远射程长达555米。
- 5、尾部多功能战术开关，一触即亮，松手即灭。
- 6、四种不同亮度可供选择，能满足各种场合的照明需求。
- 7、具有爆闪、SOS和信号灯三种特殊模式，用于应对突发、紧急状况。
- 8、防反接设计，防止电池反装时损害电路。
- 9、设置过热保护，减小对内部电路影响，延长元件使用寿命。
- 10、IPX8防水等级，能应对各种户外天气状况。
- 11、附赠一颗3.7V 3200mAh Micro USB可充电18650锂离子电池、USB充电线、手绳。

FL1 STANDARD	极高亮	高亮	中亮	低亮	爆闪	SOS	信标
	1020流明	300流明	50流明	10流明	1020流明	1020流明	50流明
	3小时	3.5小时	18小时	130小时			
	555米 (最大射程)						
	77007坎德拉 (最大光强)						
	1米 (防跌落高度)						
	IPX8 防水等级						
重量	95克 (不含电池)						
尺寸	φ31.5X120X25.4毫米						

注：以上数据按照国际手电测量标准ANSI/NEMA FL1所述之测量方法，使用1节3.6V 3400mAh 18650电池在实验室测试所得。不同电池或使用环境可能对以上数据造成影响。

电筒在开启极高亮档后会启用自动降档功能，防止过热且有效保护LED寿命。三分钟后手电亮度会降到高亮档。如果需要再次使用极高亮档，只需重启手电。

使用说明

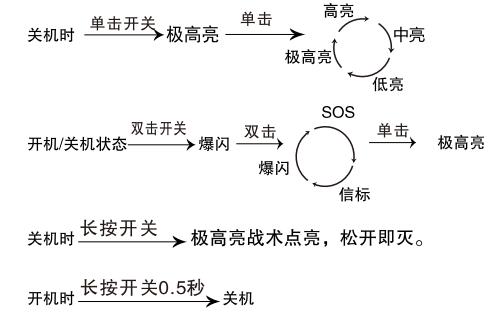

锁定功能

关机时三击进入锁定状态，指示灯闪三次，此时按键进入锁定状态。

解锁功能

锁定状态时三击解锁，指示灯闪一次，此时恢复按键功能。

低电警示功能

18650M能随时检测电池的剩余电量。如果在电量低于10%时继续使用手电，极高亮档、高亮档、中亮档将逐步暂时性取消，只能进入低亮档位。提醒你尽快需要充电或者更换电池。

温馨提示

- 1、旋开尾部装入符合要求的电池，注意将电池正极朝向手电头部
- 2、若电筒长时间未使用，请将电筒内的18650电池取出，防止漏液
- 3、不能将光线直射眼睛，避免对眼睛造成伤害

保修服务

15天包换：自售出之日起15天内，在正常使用情况下，若出现产品质量问题，客户可选择更换新品或修理服务。
1年免费保修：自售出之日起1年内，用户在正常使用情况下，产品若出现质量问题，则享受免费维修服务。
终身有限保修：超过1年免费保修期后，我们将提供有偿保修，费用以实际更换材料费用为准，不另收取人工费用。

保修凭证：消费者需要售后服务时，可凭购物发票或收据与经销商联系，由经销商对消费者提供服务，我公司将对经销商提供服务支持。免费保修不包括由以下行为造成的损坏和故障：


1. 正常使用造成的磨损
 2. 粗暴操作或者违反本手册内容的不正确操作
 3. 电池漏液或者不正确使用电池
- 想了解更多产品信息或者动态，请访问我司官方网站
www.folomov.com

留名实业有限公司

联系电话：86-(0)755 2376 9382
广东省深圳市龙华区大浪街道华繁路289号裕健丰科技园B栋403



FOLOMOV

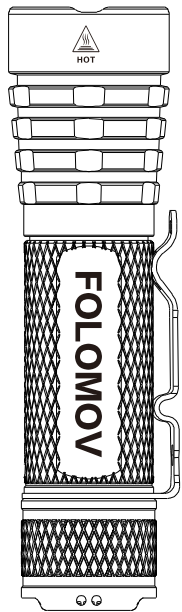

1020
LUMENS

18650M

Product features

1. 120mm length and 95g weight only. Compact and lightweight. Perfect for tactical use and outdoors sports.
2. Made of aero grade aluminum alloy. With Type III hard anodizing finish.
3. Adopt CREE XP-P LED with a span life of 50000 hours.
4. Max output up to 1020 lumens with 3 hours runtime.
5. Multi-function tactical tail switch features both temporary Turbo and constant brightness levels.
6. 4 brightness levels for option. Meet different lighting demand in various occasions.
7. With strobe, SOS and beacon modes. Helpful in emergent situation.
8. With reverse polarity protection.
9. With overheating protection. Protect internal circuit and expand the span life of electronic components.
10. IPX8 waterproof rating.
11. Including a 3.7V 3200mAh Micro USB rechargeable 18650 battery.

FL1 STANDARD	Turbo	High	Medium	Low	Strobe	SOS	Beacon
	1020LM	300LM	50LM	10LM	1020LM	1020LM	50LM
	3H	3.5H	18H	130H			
	555m (max beam distance)						
	77007CD (max intensity)						
	1m (impact resistance)						
	IPX8 (waterproof rating)						
Weight	95g(without battery)						
Dimension	φ31.5mmX120mmX25.4mm						

Note: Above parameters are result of testing 18650M in the lab with 1pc 3.6V 3400mAh 18650 according to ANSI/NEMA FL1 standard. The result may vary when using different batteries and testing in different environment.

To avoid overheating and extend internal components' span life, the flashlight will automatically step down from turbo level when high temperature is detected. For turbo level again, restart the flashlight.

Operation:

ON:

- Option 1. Press and hold the tail switch to access to Turbo mode. Releasing your finger will turn off the light.
- Option 2. Quickly press the tail switch to access turbo mode directly.

When in turbo mode, quickly press the tail switch to cycle through turbo→high→med→low→turbo.

Strobe, SOS and Beacon

1. Activation: Press tail switch twice to access to strobe no matter the light is on or off.
2. When in strobe mode, press tail switch twice to cycle through Strobe→SOS→Beacon→Strobe.
3. Press tail switch quickly to get back to turbo mode.

OFF:

Press and hold the tail switch for 0.5s.

Lockout function: Lock the tail switch to avoid accidental activation

Lock:

When the light is off, quickly press tail switch for 3 times to lock it. The LED will flash for 3 times and it will not be able to turn on.

Unlock:

While tail switch is locked, quickly press it for 3 times. The LED will flash once, then can be turned on as normal.

Low voltage warning

18650M detects battery's remaining capacity all the time. If you continue using 18650M when remaining capacity is less than 10%, Turbo, high and medium levels will not be available progressively. Only low level for option. It reminds you of replacing or charging the battery immediately.

CAUTION

1. Insert the battery with the anode side(+) towards flashlight head.
2. Pls remove inside 18650 battery if the flashlight have not been used for long time.
3. Do not shine the light to eyes.

Users can contact distributors/dealers from whom they buy Folomov products for warrant support with related trade invoice or receipt.

Warranty Details

1. 15 days free replacement: distributors/dealers will replace users a new 18650M within 15 days of 18650M purchase for any manufacturing defects if the problem develops in normal use.
2. 1 year free repair: we will offer free repair within 1 year from the date of purchase if the problem develops in normal use.
3. Limited lifetime warranty: For 18650M beyond the free repair warranty period, we provide lifetime repair but will charge for 18650M parts. Distributors/dealers will notify users the cost of parts before repair.
4. Free warranty does not cover any damage or failure caused by:
 - a. Normal wear
 - b. Rough operation
 - c. Battery leakage

For more info., please visit www.folomov.com. Welcome to follow @folomovbrand on Facebook.

LUMIN INDUSTRIAL LIMITED

www.folomov.com

Room 403, Bld. B, Yujianfeng Industrial Park, No. 289 Huafan Road, Longhua, Shenzhen, 518100 China

Tel: 86-(0)755 2376 9382

