


FOLOMOV®

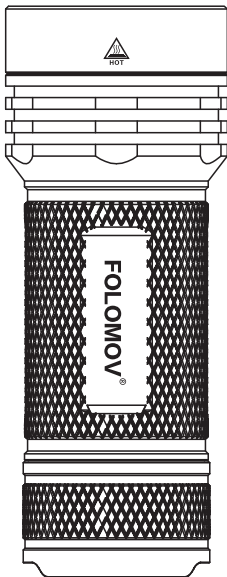

2000  
LUMENS

26650S

## Product features

1. This multi-purpose flashlight is compact, durable, and designed to be the perfect companion for any adventure.
2. The anodized frame is manufactured from tempered aeronautical aluminum and is machined to further enhance the fit and finish.
3. Use 5\*Cree XPG2 LED with a span life of 5000 hours .
4. Max ouput to 2000 lumens .
5. Multi-functional electronic tail switch provides 15 illumination modes for use in outdoor and camping
6. Includes new features such as primary modes, secondary modes, tail switch lockout, and countdown timer.
7. Includes reverse polarity protection.
8. Includes overheating protection.
9. IPX-8 Waterproof.
10. Operates using a rechargeable lithium-ion battery (26650) .

## Parameter

LED	Battery	Weight	Dimension
Cree XPG2	1*26650 Li-ion	97G (without battery)	38*99mm

FL 1 STANDARD	Turbo	High	Middle	Low	Lowest Strobe	SOS	Beacon
	2000LM	800LM	400LM	180LM	80LM	2000LM	2000LM
	3H	3.5H	7H	15H	60H		
	216M ( max beam distance )						
	11670Cd (max intensity)						
	1m (impact resistance)						
	IPX8 (waterproof rating)						
Weight	97g (without battery)						
Dimension	Φ 38 * 99 mm						

NOTE: The technical data mentioned above was recorded using a 5000mAh 26650 battery in accordance with the standards provided by ANSI/NEMA FL1. Your results may vary when testing in a different environment or when using a different battery. To avoid overheating and improve component lifespan, this flashlight will automatically power down from Turbo mode whenever high temperatures are detected. Simply restart the flashlight to engage the Turbo setting again.

## Multi-functional Tail Switch

This flashlight features two primary modes: tactical and illumination. Within these modes are additional sub-modes which help make the flashlight more suitable for specific applications. For example, this flashlight will allow for both trigger operation and traditional on/off operation. To switch between these two modes, you must press the tail switch seven times consecutively. The LED will flash 6 times to confirm that the mode has been switched.

## Tactical mode:

There are three sub-modes to the tactical mode: sub-mode one, sub-mode two, and sub-mode three.

Sub-mode 1: On demand usage of the tail switch (hold to engage light and release to disengage light)

Sub-mode 2: Quickly press the switch to turn on the flashlight and automatically engage Turbo mode

Sub-mode 3: Quickly press the switch twice to turn on the flashlight and automatically engage the Strobe

To turn the flashlight off in tactical mode, quickly press the tail switch.

OFF:

Quickly press the tail switch

## Illumination mode:

There are two sub-modes to the illumination mode: sub-mode one and sub-mode two.

Sub-mode 1: Press and hold the tail switch for 0.5 seconds to access the turbo light output . You may also follow up this command with a rapid switch press which will engage the standard memorized mode.

Sub-mode 2: Quickly press the tail switch to access your preferred memorized mode

Please note the sequence of modes: moonlight, low, medium, high, turbo, high, medium, low, moonlight.

To turn the flashlight off in illumination mode, press the tail switch for 0.5 seconds.

1. Press tail switch for 0.5s to turn off the light.

## Strobe, SOS, and Beacon Information

To engage the flashlight's strobe functionality, simply press the tail switch twice. Once the strobe is engaged, simply repeat the above control to cycle through the various strobe modes. Strobe patterns include SOS, beacon, and regular strobe.

Press the tail switch quickly to return to the memorized illumination mode.

(Please note that this functionality is unavailable in the tactical mode and will only work in illumination mode)

## Flashlight Lockout

This function allows you to lock the tail switch and prevent accidental engagement of the flashlight. In order to engage the lockout feature, you must turn the flashlight off and press the tail switch 3 times and wait for three confirmation blinks from the LED. Your flashlight is now locked and can not be turned on.

To unlock the flashlight, simply press the switch three times and wait for one confirmation blink from the LED. Your flashlight will now operate normally.

## Countdown Timer

When the flashlight is on, quickly press the tail switch 3 times. This will set a 3 minute countdown timer. The LED will flash once to confirm the activation of the countdown. In 3 minutes, the flashlight will automatically turn off.

If you press the tail switch another 3 times, the countdown timer will increase in 3 minute increments (3 minutes, 6 minutes, 9 minutes, etc...). Any usage of the tail switch will cancel the countdown timer.

## Low Voltage Warning

This flashlight is equipped with low voltage detection which means it will place the flashlight into a limp mode (reduced power output) if the battery capacity is detected to be less than 10%

## CAUTION

1. Insert the battery with the button top (+) side inserted first and facing TOWARDS the front of the flashlight
2. Please remove the battery from the flashlight if you plan on extended storage
3. Never shine this flashlight directly at or towards the eyes of another human or animal

Users can contact distributors/dealers from whom they buy Folomov products for warrant support with related trade invoice or receipt.

## Warranty Details

1. 15 days free replacement: distributors/dealers will replace users a new 26650S within 15 days of 26650S purchase for any manufacturing defects if the problem develops in normal use.
2. 1 year free repair: we will offer free repair within 1 year from the date of purchase if the problem develops in normal use.
3. Limited lifetime warranty: For 26650S beyond the free repair warranty period, we provide lifetime repair but will charge for 26650S parts. Distributors/dealers will notify users the cost of parts before repair.
4. Free warranty does not cover any damage or failure caused by:

- a. Normal wear
- b. Rough operation
- c. Battery leakage

For more info., please visit [www.folomov.com](http://www.folomov.com). Welcome to follow @folomovbrand on Facebook.

## LUMIN INDUSTRIAL LIMITED

[www.folomov.com](http://www.folomov.com)

Room D906, Tianhui building, Yousong Road, Longhua District, Shenzhen, China

Tel: 86-(0)755 2376 9382

ROHS

