


KO-02 EVERY DAY CARRY SERIES

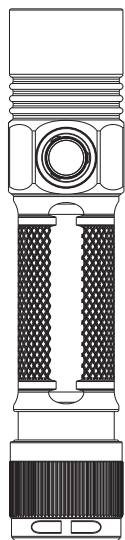

使用说明书

感谢您购买我们的产品!
www.jetbeamlight.com

产品特点

- 防尘、防水、EDC、探、搜、救等户外活
- 采用CREE XHP35 LED, 寿命可达50000小时
- 可用一节21700锂电池, 兼容20700/18650锂电池, 最高可达2000流明亮度, 285米射程
- 强力磁吸式尾盖, 双手自由
- 尾部按开关, 五种亮度和爆闪功能
- 内置USB Type-C 充电接口
- 高效恒流电路, 智能温控, 最大程度保证使用安全性及性能稳定
- 电量指示功能, 随时掌握电量
- 防反接, 防止电池反装造成危害
- 双面镀膜防刮光学镜片
- 航空级铝合金制造
- 超耐磨、三阳极氧化表面处理
- IPX-8防水
- 1米抗摔高度
- 尾部倒立功能

产品参数

- LED: CREE XHP35 LED
- 最大光通量: 2000流明
- 反光杯精密粘胶反光杯
- 镜片: 钢化玻璃
- 筒身材料: 航空级铝合金
- 筒身表面处理: 三阳极氧化表面耐磨处理
- 使用电池: 1*21700/1*20700/1*18650锂电池
- 开关: 尾部按开关
- 尺寸: 131.5mm x 26.5mm x 28mm
- 重量: 110克(不含电池)

电池

电池类型	尺寸规格	标称电压	是否可用
可充电锂离子电池	21700	3.7V	推荐
可充电锂离子电池	20700	3.7V	可用
可充电锂离子电池	18650	3.7V	可用

亮度与射程

FL1 STANDARD	极亮	高亮	中亮	低亮	节能	警示
	2000流明	1100流明	380流明	85流明	15流明	2000流明
	1.9小时	2小时	6.5小时	25小时	140小时	—
	285米(最远射程)					
	20306坎德拉(最大光强)					
	1米(防跌落高度)					
	IPX-8(水下2米)					

配件: 防水O圈、手绳、抱夹、USB Type-C 充电线、3.6V 5100mAh 21700锂电池




注:

以上数据是按照国际筒灯量规ANSI/NEMA FL1所述之量规方法使用一节JETBeam 3.6V 5100mAh 21700锂电池在室内量所得, 不同电池或使用环境可能会以上数据产生影响。

操作

装入电池

1. 打开尾盖, 从包装取出电池以及筒灯
2. 筒灯正极朝向筒灯尾部(LED所在的一端)装入筒灯
3. 旋紧尾盖

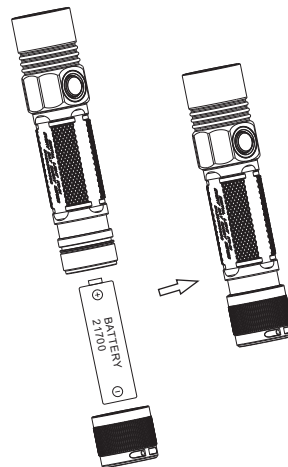

警告

1. 请勿将筒灯按照正极朝向筒灯方向放入, 反装筒灯筒灯不能工作。
2. 不能将筒灯直接照射眼睛, 以免眼睛造成伤害。

开/关机

短按开关开机, 长按0.5s关机

档位切换

开机状态下, 按开关, 档位从极亮档 高亮档 中亮档 低亮档 节能档 循环切换亮度。

爆闪

双击开关开启爆闪, 再次单击, 关闭爆闪。

电量指示

按下尾部电量指示灯, 开机状态下筒灯电量指示灯常亮, 表示电量充足;

筒灯电量指示灯闪烁, 表示电量不足;

筒灯电量指示灯常亮, 表示电量不足。

筒灯电量指示灯常亮, 表示电量严重不足。

充电功能

本品有Type-C 充电接口, 最大输入5V 1A。充电中, 按下筒灯尾部的LED指示灯常亮; 筒灯LED指示灯常亮, 表示筒灯充满。

智能温控

筒灯在极亮档工作下会发出大量的热量, 有效延长LED寿命及防止外壳温度过高, 筒灯将降低亮度, 保持到人体握感舒适的温度。

低档降档功能

在筒灯电量低时, 筒灯主档减档以延长工作时间, 直到减档到节能档, 当筒灯电量低时, 筒灯关机。

解除与解除

在未开机和关机状态下, 按开关, 筒灯两次, 筒灯解除;

在筒灯状态下, 筒灯或双击, 筒灯一次。筒灯解除筒灯解除按3s, 筒灯两次解除成功。

保养电筒

1. 长时间不用手电时请取出电池
2. 保存手电时请远离有火和潮湿环境
3. 请每半年使用软布清洁电筒的螺牙, 并使用硅润滑油润滑螺牙, 另请经常清洁手电的导电接触面/接触点。

保固

JETBEAM® 产品拥有售后保固服务。在购买本产品的15天内, 如果有任何质量问题均可向经销商要求免费更换。在购买本产品的60个月内享受免费保固服务。在超过60个月免费保固期后, 本产品享有终身有限度保固服务, 如需要更换重要部件则需要收取成本费用。

本保固规则不适用于以下情况:

1. 人为破坏, 拆解, 改装本产品
2. 错误操作导致产品损坏(如装反电池等)。
3. 电池漏液导致产品损坏。
4. 盐水或海水腐蚀导致产品损坏

如需协助, JETBEAM® 敬请消费者首先联系购买产品的经销商或零售商, 以获得最迅速的售后服务或发邮件到 info@jetbeamlight.com。

备注: 产品数据如有更新, 敬请以JETBEAM官方网站为准。


★ 仅限国内区域, 跨区销售将不予保修。

深圳市杰特明电子科技有限公司

咨询热线: +86-0755-27523445
销售邮箱: info@jetbeamlight.com
网址: www.jetbeamlight.com
公司地址: 广东省深圳市龙华新区大浪南路墩背工业区二栋三楼
邮编: 518109



KO-02 EVERY DAY CARRY SERIES

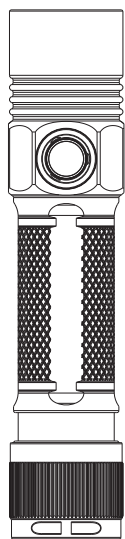

Manual

Thank you for choosing our products!
www.jetbeamlight.com

Features

- Mainly used for outdoor camping, EDC, adventuring, searching & rescuing etc.
- Uses one CREE XHP35 LED with a lifespan of 50,000 hours.
- Max output of 2000 lumens and throw distance of 285 meters.
- Strongly Magnetic Tail Cap For Hands-free Using.
- Powered by 1*21700 Li-ion battery, compatible with 1*20700 or 1*18650 battery.
- Side switch, five levels of brightness and strobe available.
- Built-in Type-C charging port.
- Digitally regulated circuit and intelligent temperature control system to optimize the performance and maximize LED lifespan.
- Low power indicator LED reminds the user of battery replacement and remaining power level.
- Reverse polarity protection to protect from improper battery installation.
- Toughened ultra-clear mineral glass with anti-reflective coating.
- Constructed from aero grade aluminum alloy.
- HA III military grade hard-anodized finish.
- Waterproof rating: IPX-8 (2 meters under water).
- Within the impact resistance height of 1 meter.
- Magnetic tailcap with stand capability.

Specifications

- LED: CREE XHP35 LED
- Maximum output: 2000 lumens
- Reflector: orange reflector
- Lens: Coated toughened glass
- Body material: Aero grade aluminum alloy
- Finish: HA III military grade hard-anodized
- Battery: 1*21700/1*20700/1*18650 battery
- Switch: Side Switch
- Dimensions: 131.5mm (Length)x28mm (Head) x26.5mm (Tail)
- Weight: 110g (Without battery and bracket)

Battery for Use

	Type	Nominal Voltage	Compatibility
Rechargeable Lithium battery	21700	3.7V	Yes(recommended)
Rechargeable Lithium battery	20700	3.7V	Yes
Rechargeable Lithium battery	18650	3.7V	Yes

Output & Runtime

FL1 STANDARD	Turbo	High	Medium	Low	Eco	Strobe
	2000LM	1100LM	380LM	85LM	15LM	2000LM
	1.9h	2h	6.5h	25h	140h	—
	285m					
	20306cd					
	1m (Impact Resistance)					
	IPX-8 (Underwater 2 meter)					

Included for Free: O-ring, lanyard, clip, USB Type-C charging cable, 3.6V 5100mAh 21700 rechargeable Li-ion battery




Note

The above data complies with American National Standard Institute ANSI/NEMA FL1 Standard. Data was obtained by using one JETBeam 3.6V 5100mAh rechargeable 21700 battery in lab. Different data may result when using different batteries.

Operation of flashlight

Insert the battery

1. Open the tail cover and remove the flashlight and battery from the package
2. Insert the battery's positive pole towards the head of the flashlight (the end where the LED is located)
3. Tighten the end cap and insert the battery

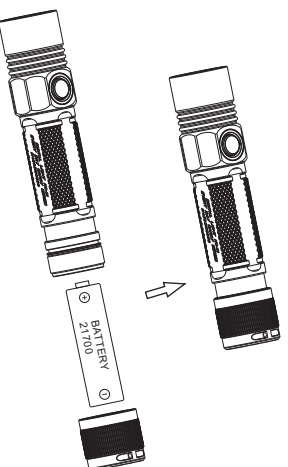

Warning

1. Please put the battery in the direction of the positive pole toward the lamp head, and the battery flashlight will not work if it is reversed
2. Do not shine light directly on the eyes to avoid damage to the eyes.

On/Off

Short press the side switch to turn on, keep pressing the side switch for 0.5 seconds to turn off.

Mode Change

When the light is on, short press the switch can change the brightness mode, cycling by Turbo--High--Mid--Low--Eco.

Strobe Mode

Double press the side switch will access strobe, press the switch again will return off the strobe.

Power Indicator

When the light is turned on, The LED beneath the side switch will indicate the battery level.

Stay in Green, battery powerfully charged;

Flash in Green, battery power is enough;

Flash in Red, battery power is low;

Keep in Red, battery power is extremely low and needs recharging.

Charging

Built-in Type-C charging port, Max input 5V 1A. In the charging process, the red LED under the side switch will flash, the green LED will be constant on when charging is completely done.

Intelligent Temperature Control

Prolong the lifespan of LED and light with intelligent temperature control design by stepping down the brightness automatically when light is too hot.

Low Voltage Brightness Adjustment

When the battery is low, the flashlight will automatically adjust the brightness level to a lower level to extend working time. The flashlight will be turned off when the battery is too low.

Lock and unlock

When the light is off and unlocked state, long press the switch, the flashlight flashes twice will enter the lock state; in the lock state, click or double click, the flashlight flashes once means the light is in the lock state. Keep pressing till the flashlight flashes two times unlocked into standby.

Light Maintenance

1. Take the battery out for storage if light will not be used for a long time
2. Keep the light away from heat, static electricity, and high humidity
3. Clean the thread and conductive contact of light with soft cloth. Lubricate the threads every 6 months

Warranty

We provide 60 months (5 years) of warranty period for this product from the date of purchase in case defects caused by material or workmanship with normal use. Necessary material and labor cost will be charged after this period

Free warranty does not cover any damages or failure if:

1. This product is disassembled or modified by anyone other than an authorized JETBeam warranty technician.
2. This product is damaged by using the wrong battery or incorrect usage.
3. This product is damaged by defective batteries (such as battery leak).
4. Salt water and corrosive damage to the unit.

Service

1. In need of warranty service, please contact your local official JETBeam dealer

2. To contact JETBeam, please refer to below information:

Email: info@jetbeamlight.com

Phone: +86-0755-27523445

For the latest update, please visit

www.jetbeamlight.com

330X120mm 128g双铜, 单黑双面印刷, 风琴折