


Lithium Manganese Dioxide Battery

2CR11108

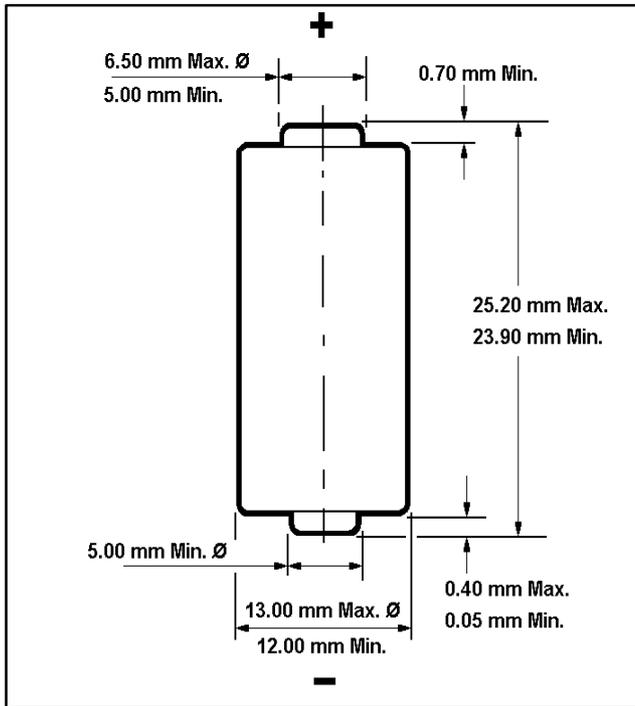

SPECIFICATIONS

| | |
|---------------------------------|-------------------------|
| Minimum No Load Voltage: | 6.2 V |
| Minimum On Load Voltage: | 5.4V on 120Ohms at 1000 |

| | |
|---------------------|----------------------------|
| Minimum Life | 26 H 1k Ohms Hr/Day 4 V |
|---------------------|----------------------------|

| | |
|-----------------------|------------------------------|
| Rated Capacity | 150 mAh on 2.2kOhms to 4V |
|-----------------------|------------------------------|

| | |
|---------------|---------------------|
| Volume | 2.8 cm ³ |
|---------------|---------------------|

| | |
|---------------|------|
| Weight | 9.4g |
|---------------|------|

| Physical Size in mm | Max | Min |
|---------------------|------|------|
| Height/Length | 25.2 | 23.9 |
| Width/Diameter | 13 | 12 |
| Depth | | |

Typical Discharge Characteristics

