


## M 37 高亮远射系列

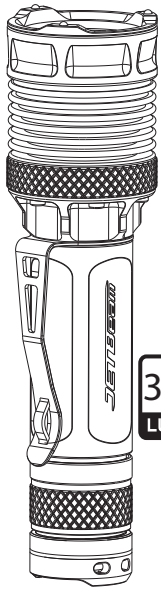

3000  
LUMENS

## 使用说明书

感谢您购买我们的产品！  
www.jetbeamlight.com

### 产品特点

- 专为军警、执法、探险及户外所设计
- 采用CREE XHP50.3 LED, 最高输出达3000流明
- 使用晶透技术, 结合全新数字化光学系统设计光杯, 射程可达340米
- 配备1节带TYPE-C接口18650动力电池
- 攻击头钢圈顶端配有三颗超高硬度氧化锆陶瓷珠, 助于迅速破窗
- 数字恒流驱动电路, 续航最长可达48小时
- 三种常亮模式+爆闪
- 新一代C数字电路设计, LED与电池双重智能保护, 最大程度延长LED和电池使用寿命, 使用更安全
- 双面镀膜防刮光学镜片
- 航空级铝合金制造
- 三级硬质阳极氧化抗磨表面处理
- IPX-8级防水(水下2米)
- 1.5米抗防撞高度

### 产品参数

- LED: CREE XHP50.3
- 最大输出: 3000流明
- 反光杯: 桔面反光杯
- 镜片: 镀膜矿物质玻璃
- 筒身材质: 航空级铝合金
- 筒身处理: 军规三级硬质氧化/微弧氧化白色
- 使用电池: 1\*18650
- 开关: 尾部开关
- 长度: 143mm
- 头部直径: 37.5mm
- 尾部直径: 25.5mm
- 重量: 132.5克(不含电池)

### 用电池

电池类型	尺寸规格	标称电压	是否可用
可充电锂离子动力电池	18650	3.7V	推荐
可充电锂离子电池	16340	3.7V	否

01

### 亮度和

FL1 STANDARD	高亮	中亮	低亮	爆闪
	3000流明	600流明	30流明	3000流明
	1.8小时	2.8小时	48小时	-
	340米			
	28800坎德拉			
	1.5米			
	IPX8			

免送: 1节TYPE-C接口18650 3500mAh动力电池, 手绳, 防水圈, 充电线, 抱夹



注:

1. 以上数据是按照国际电筒测量标准ANSI/NEMA, FL1所述之测量方法, 使用1节JETBeam 18650 3500mAh(3.7V)可充电力锂电池在实验室内测量所得, 不同电池或使用环境可能会对以上数据产生影响;
2. 电筒在开启1分钟高亮档后会启用自降档功能, 防止过热并且有效保护LED寿命, 温度过高时手电开始缓慢降档, 直到亮度低于70%, 如果需要再用超高亮档, 只需关闭电筒再次打开即可。

### 警告


1. 请将电池按照正负极灯头方向放入, 反装电池电筒将不能工作。
2. 若电筒放在背包内运输或者长时间储存请把电筒内的电池取下防止错误开启或电池漏液。
3. 不能将光线直接照射眼睛, 以免对眼睛造成伤害。

02

### 操作手

#### 装入电池

1. 打开尾盖, 从包装内取出电池;
2. 电池正极朝向手电头部(LED所在的一端)装入手电;
3. 旋紧筒身;
4. 如你已装上抱夹, 拆装电池时请扭筒身另一端螺母, 以免报夹挂花筒身。



#### 开/关机

按下尾部开关即可点亮或关闭手电。

#### 档位切换

开机状态下, 关机再快速开机(3秒内)切换到下一档 默认高-中-低-高 不带记忆。  
关机状态下, 连续轻触尾按开关(半按), 选择档位后再将开关按到底。

#### 入爆闪

关机状态下快速轻触两次尾部开关进入爆闪档。

#### 保功能:

电路具降功率保护功能, 高档位1分钟后会逐渐降档, 保护电路;  
电路具有低压降档, 低压时逐级降档以增加运行时间和保护电池;  
电路具有低压关机功能, 低于2.6V关机, 保护电池。

03

### 保养简

1. 长时间不用手电时请取出电池
2. 保存手电时请远离有火和潮湿环境
3. 请每半年使用软布清洁电筒的螺母, 并使用硅润滑油润滑螺母, 另请经常清洁手电的导电接触面/接触点。

#### 保固

JETBEAM® 产品拥有售后保固服务。在购买本产品的15天内, 如果有任何质量问题均可向经销商要求免费更换。在购买本产品的60个月内享受免费保固服务。在超过60个月免费保固期后, 本产品享有终身有限度保固服务, 如需要更换重要部件则需要收取成本费用。

本保固不适用于以下情况:

1. 人为破坏, 拆解, 改装本产品
2. 错误操作导致产品损坏(如装反电池等)。
3. 电池漏液导致产品损坏。
4. 盐水或海水腐蚀导致产品损坏

如需协助, JETBEAM® 敬请消费者首先联系购买产品的经销商或零售商, 以获得最迅速的售后服务或发邮件到 info@jetbeamlight.com。

注: 产品数据如有更新, 敬请以JETBEAM官方网站为准。

#### 深圳市杰特明电子科技有限公司

咨询热线: +86-0755-28077748

销售邮箱: info@jetbeamlight.com

网 址: www.jetbeamlight.com


公司地址: 广东省深圳市龙华新区大浪南路墩背工业区二栋三楼

邮 编: 518109



04

## M 37 Highlight long-range series

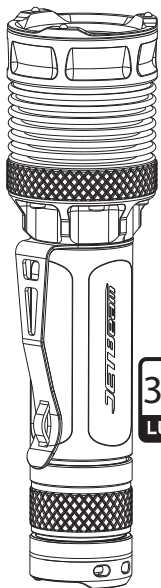

3000  
LUMENS

## Operation Manual

Thank you for choosing our products!  
www.jetbeamlight.com

### Features

- Designed for military, police, law enforcement, adventure and outdoor use.
- 3,000 lumen max output with 340 meters throw
- Powered by two USB-C rechargeable 18650 batteries with a runtime reaching up to 48 hours for endurance applications.
- The top of the attack head rim is equipped with three ultra-high hardness zirconia ceramic beads, which help to break the window quickly.
- Three constant brightness modes + strobe.
- Rated IPX8 waterproof, 2m submersible, and 1m drop resistant.
- Constructed from aerospace-grade aluminum alloy.
- HAIII Military Grade Hard anodized finish.

### Specification

- LED: CREE XHP50.3
- Maximum output: 3000 lumen
- Reflector: Orange reflector
- Lens: Coated mineral glass
- Barrel body: aerospace-grade aluminum alloy
- Barrel Finish: Military grade 3 hard oxidized / micro-arc oxidized white
- Battery: 1\*18650
- Switch: Tail switch
- Length: 143mm
- Head diameter: 37.5mm
- Tail diameter: 25.5mm
- Weight: 132.5g (without battery)

### Battery for Use

	Type	Nominal Voltage	Compatibility
Rechargeable Lithium battery	18650 power battery	3.7V	Yes (recommended)
Rechargeable Lithium battery	16340	3.7V	NO

01

### Output & Runtime

FL1 STANDARD	High	Medium	Low	Strobe
	3000LM	600LM	30LM	3000LM
	1.8h	2.8h	48h	-
	340m			
	28800cd			
	1.5m			
	IPX8			

#### In the box:

- 18650 3500mAh USB-C rechargeable li-ion battery
- O rings
- Lanyard
- USB charging cable
- Clip



Note

1. The above data is in accordance with the international flashlight measurement standards ANSI/NEMA, FL1 described in the measurement method, the use of a JETBeam 18650 3500mAh (3.7V) rechargeable lithium batteries in the laboratory measurements, different batteries or use of the environment may have an impact on the above data;
2. The flashlight in the opening of the 1-minute high brightness mode will be activated after the self-downshift function. To prevent overheating and effectively protect the LED life, when the temperature is too high, the flashlight starts to slowly downshift, until the brightness is less than 70%, if you need to use the super bright gear again, just turn off the flashlight and turn it on again.

### Warning


- Insert the batteries with the positive (+) end pointing forward, otherwise the light doesn't work.
- Avoid direct eye contact with light as it will cause damage.

02

### Operation of flashlight

#### Insert batteries

- Unscrew and remove the tail cap of the flashlight.
- Insert two 18650 batteries with the positive (+) end pointing forward.
- Replace the tail cap and fasten tightly.
- If you have installed the clip, please twist the threads on the other end of the flashlight when removing the batteries to prevent the clip from hanging on the flashlight.



#### ON/OFF S witching:

The flashlight can be turned on or off by pressing the switch at the end.

#### Mode S witch

When the flashlight is turned on, turn it off and then turn it on again quickly (within 3 seconds) to switch to the next mode High-Medium-Low-High without memory.

Under the off state, touch the tail switch (half press) continuously to select the mode and then press the switch to the bottom.

#### S trobe Mode:

Under the power off state, touch the tail switch twice quickly to enter the flash mode.

#### Protection Function

Circuit with power down protection function, high gear will gradually downshift after 1 minute to protect the circuit;

Circuit with low voltage downshift, low voltage step by step downshift to increase the running time and protect the battery;

Circuit with low voltage shutdown function, lower than 2.6V shutdown to protect the battery.

03

### Storage and maintenance

1. Remove the batteries if light will be stored or unused for an extended time period.
2. Store the flashlight away from fire and high humidity/salty environments.
3. Clean the body with a soft cloth; lubricate threads and O-ring with silicon grease semi-annually.

### Warranty

1. Within 15 days of purchase, free replacement is provided by seller.
2. JETBeam offers a 24 month (2 year) free warranty service from date of purchase. Buyer will only be responsible for shipping costs of item. After 24 months, buyer is responsible for replacement parts as well as shipping costs.

### Unwarrantable

1. Excessive damage, abuse, or neglect.
2. Disassembly and unauthorized modifications.
3. Damage caused by "no-name" /generic batteries that are not regulated
3. Damage due to improper storage or battery leakage.

### Service

1. Contact your retailer or email us info@jetbeamlight.com. call us +86-755-28077748.
2. Any update information will be displayed on www.jetbeamlight.com, and which we reserve the right to change information.

For more information, please follow us on facebook: JETBeam.

JETBeam Electronic Technology Co., Ltd  
E-mail: info@jetbeamlight.com

Tel: +86-0755-28077748

Fax: +86-0755-28175738

Website: www.jetbeamlight.com

Address: Dunbei Industrial Park, Dalang South Road, Longhua Town, Shenzhen, China, 518109



04

275x120mm 128g双铜, 单黑双面印刷, 风琴折