



World Headquarters  
601 Rayovac Drive  
Madison, WI 53711  
Telephone 1-800-331-4522  
Internet [www.rayovac.com](http://www.rayovac.com)

Marketing Data Sheet - Batteries

S6600194  
Issue R  
Memo No: [MDSR0104](#)

Rayovac Stock Number: **926**

Name: **926 GENERAL PURPOSE CARBON ZINC**

**ENGINEERING DATA:**

**Cell Chemistry:** Carbon Zinc

**Designation:** ANSI/NEDA – 926

**Nominal Voltage:** 12 volts

**Approximate Weight:** 2 Lb 11 Oz (1.22 Kg)


**Approximate Volume:** 74 CU IN (1213 CU CM)

**Operating Temp. Range:** -30° C to 55° C  
(-20° F to 130° F)

**Terminals:** Screw

**Shell:** Plastic

**Environmental:** Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal. No Mercury Added Formulation  
[Rayovac Material Safety Data Sheets](#)

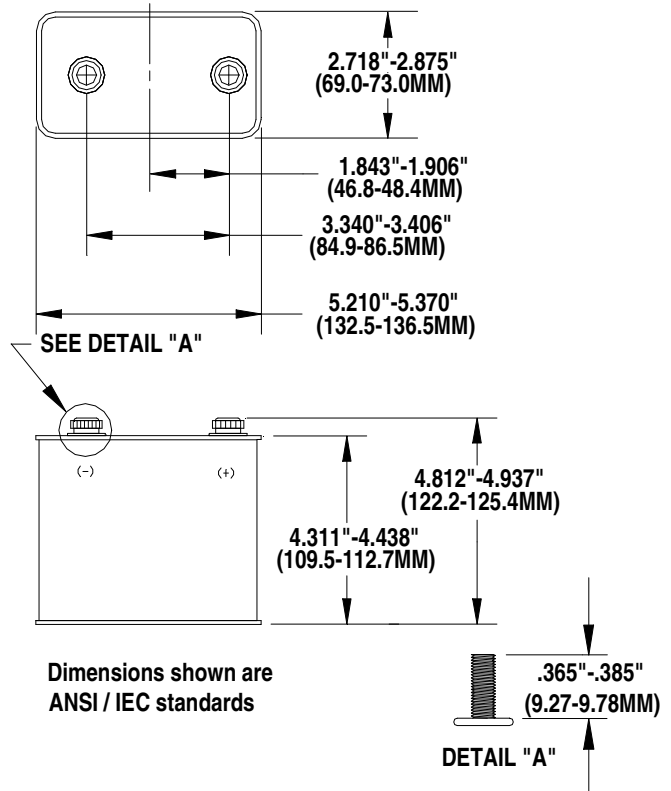

Dimensions shown are ANSI / IEC standards

DETAIL "A"

TYPICAL INITIAL SERVICE AT 70°F (HOURS)  
CUTOFF VOLTAGE

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA AT 9.6V)	CUTOFF VOLTAGE					MAh CAPACITY To 5.2V
			8.8V	8.0V	7.2V	6.0V	5.2V	
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	18	533	6.2	9.3	11.7	15.3	17.7	7,900
PORTABLE LIGHT (CONTINUOUS-24 HR/DAY)	18	533	5.4	7.9	10.4	14.3	16.5	7,200

538376

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.