


Lithium Manganese Dioxide Battery

CR2477


■ Dimensions(mm)

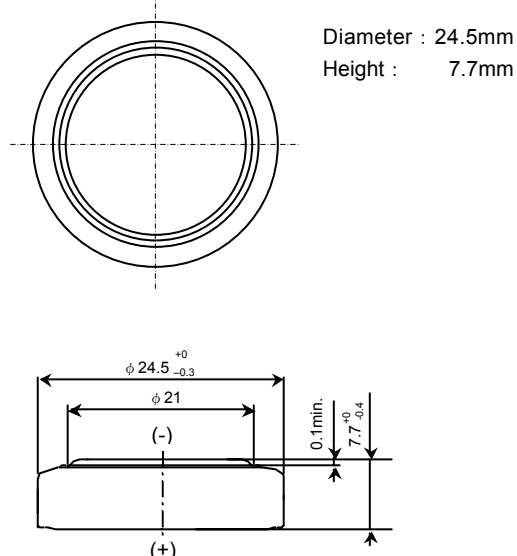


■ Specifications

Nominal Voltage	3V
Nominal Capacity (2.0V cutoff)	1000mAh
Standard Discharge Current	0.4mA
Weight	10.0g
Applications ● Memory Back-up Power Source for SRAM or Real Time Clock (RTC)	


■ Discharge Characteristics

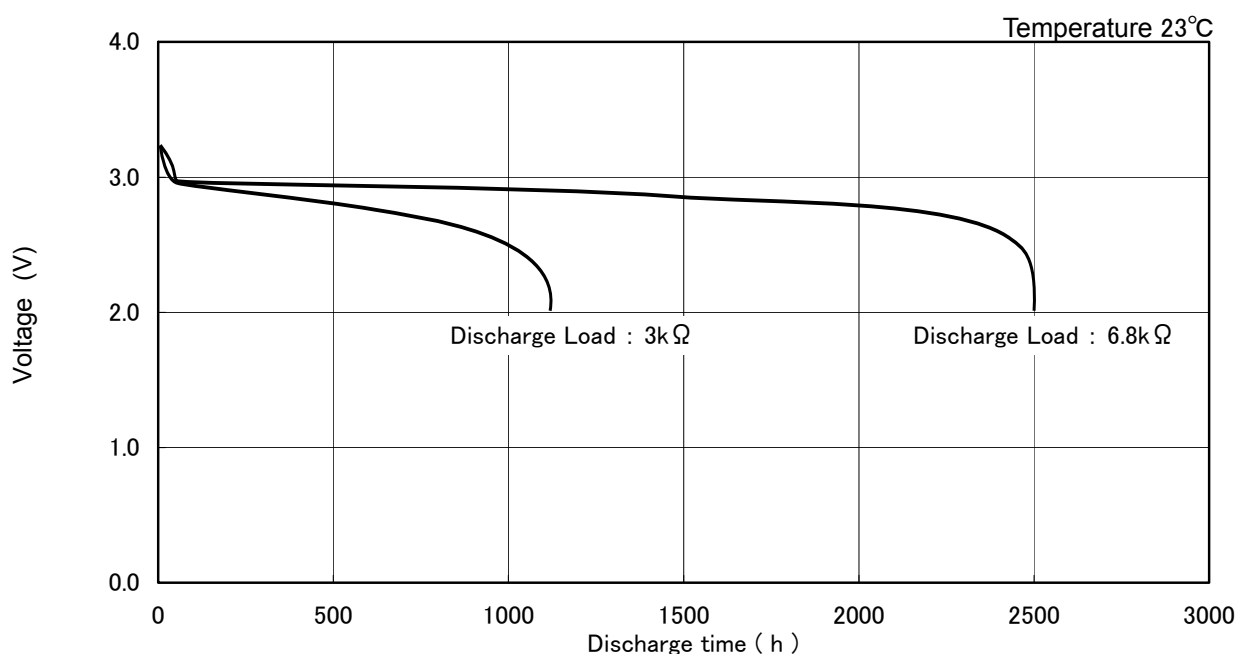


■ Discharge Characteristics on Load

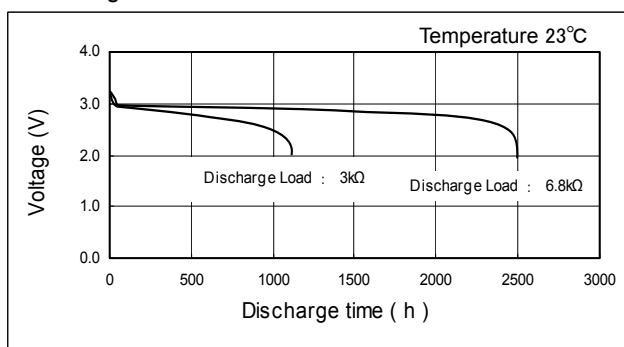


■ Discharge Characteristics on Temperature

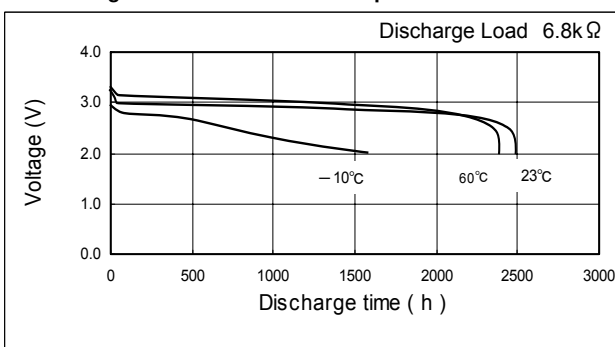


■ Discharge Load vs. Operation Voltage (Discharge depth 40%)

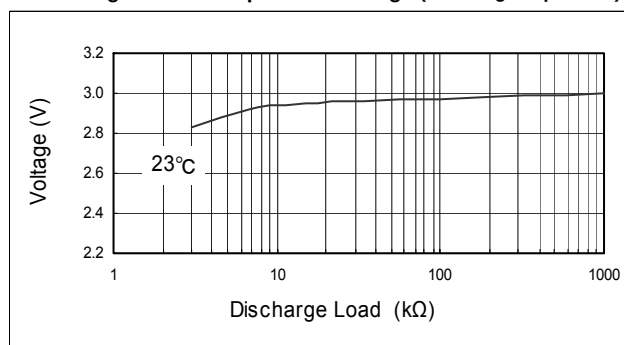


■ Discharge Load vs. Discharge Capacity

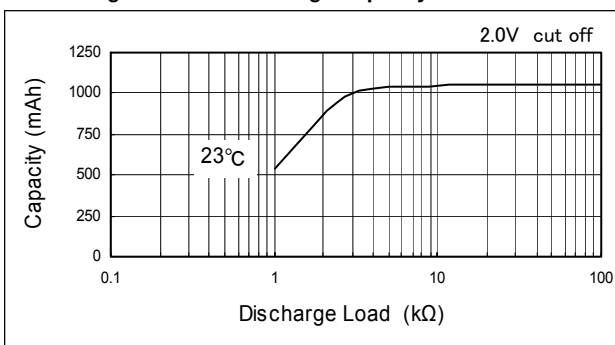

■ Discharge Characteristics on Pulse Load (Discharge depth 40%)

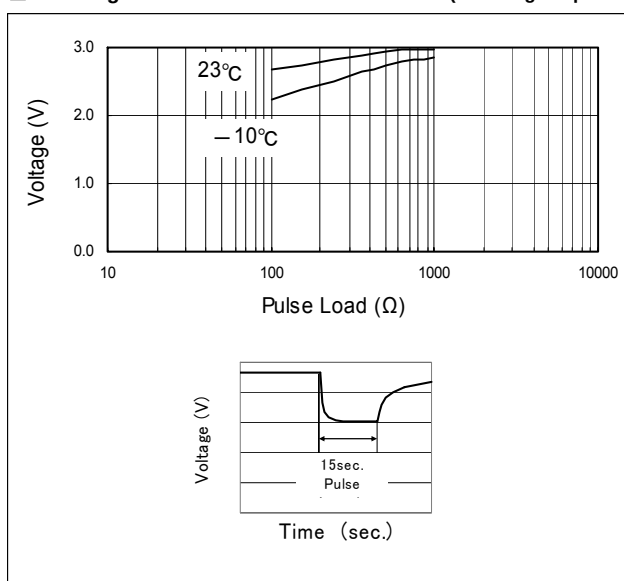

■ Storage Characteristics

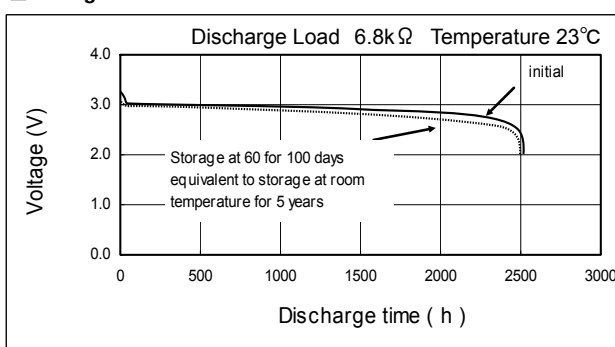

* These values are not guarantee.