



ARICELL SCL-14

Bobbin Construction Size C

Scope: This data sheet describes the mechanical design and electrical performance of the AriCell SCL-14, C-size, 3.6V, 8.5Ah, Primary Lithium Thionyl chloride (SOCl₂), HIGH ENERGY battery.

Characteristics:

Nominal voltage: 3.6V


Nominal capacity: 8.5Ah (@ 1.19kΩ / 3mA at 25°C, cut-off voltage 2V)

Maximum recommended continuous current: 100mA

Maximum recommended pulse current: 200mA

Operating temperature range: -55°C to +85°C


Nominal weight: 51g

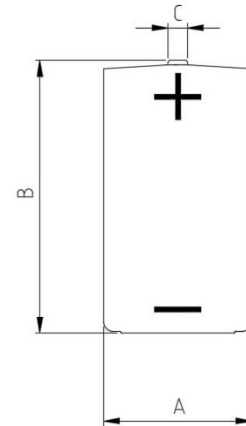


units=mm

SCL-14	A	B	C
	Max.25.8	Max.49.6	Ø 4.3


Discharge Characteristics at 20°C

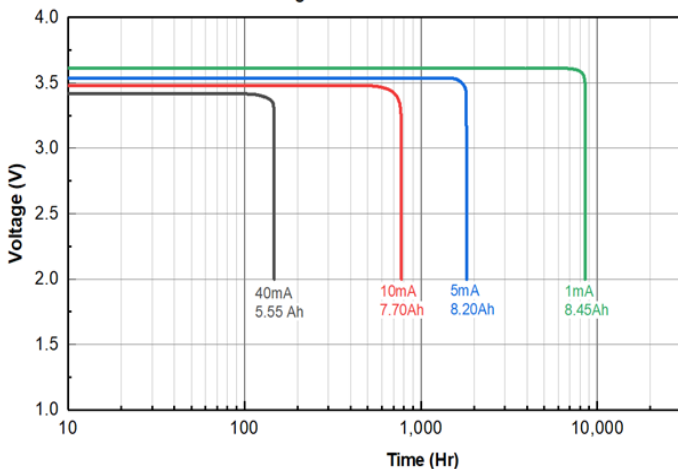

Capacity vs. Current

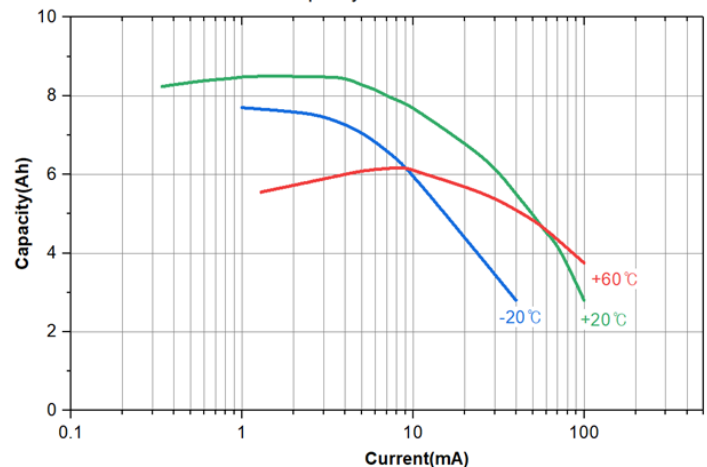

Operating Voltage

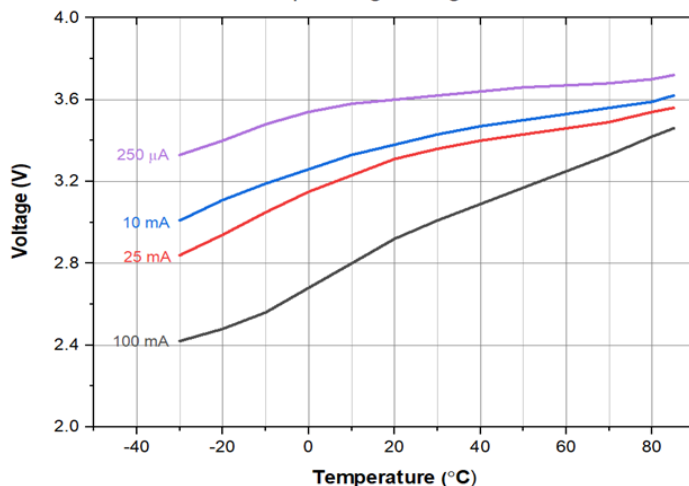

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Manufactured for, and distributed by:
Devon Company

680 Main Street, Ste. 206 Watertown, CT 06795

Phone: (860)945-1177 Fax: (860)274-5381

Email: info@devon-company.com

www.devon-company.com