

### Key Features

- Industry Highest Cell Capacity & High Energy
- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Wide operating temperature range (- 20°C / + 75°C)
- Low self-discharge with long operating life (<1% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
  - Safety: IEC 60086-4
  - Transport: UN 38.3
  - RoHS and REACH compliance
  - Quality: ISO 9001, Duracell World Class Continuous Program

### Electrical characteristics

▪ Nominal capacity (100 Ohm Cont., 2V cut-off)	920 mAh
▪ Typical Voltage (at + 20 °C)	3.2-3.3 V
▪ Standard Continuous Discharge Current	20 mA
▪ Maximum Continuous Discharge Current	60 mA
▪ Maximum Abnormal Charge Current	20 mA
▪ Nominal Energy	2.55 Wh
▪ AC Impedance @ 1kHz	300 mOhm

### Physical characteristics

▪ Typical weight	11 g (0.39 oz.)
▪ Li metal content	approx. 0.30g

### Operating & Storage conditions

▪ Operating temperature range	-20°C to 75°C (-4°F to 167°F)
▪ Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)




Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharged data shown for examples of the energy/service life that the battery will provide for various load conditions.


### Typical applications

- Cameras
- Security devices (sensors)
- Smoke Detectors
- Wireless Sensors
- Remote Controls
- Pet Training Collars
- High Intensity Flashlights
- Laser Sights


Rated Capacity  
100 ohm Continuous

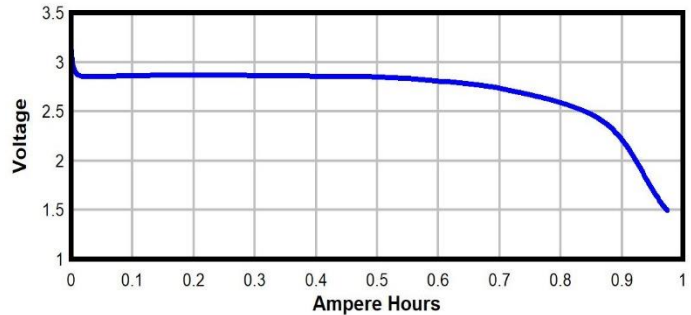

Pulse Discharge

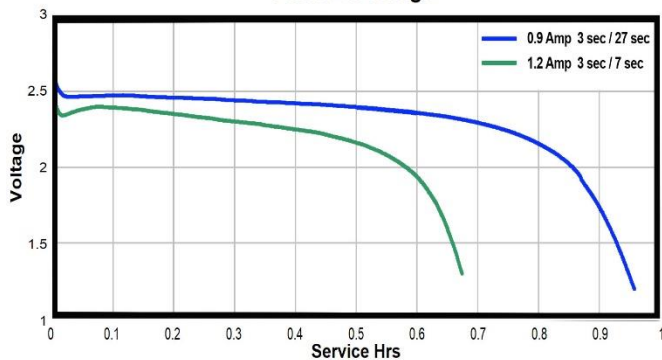


Pulse Discharge @ Variuos Temperatures  
1.2A 3 sec / 7 sec

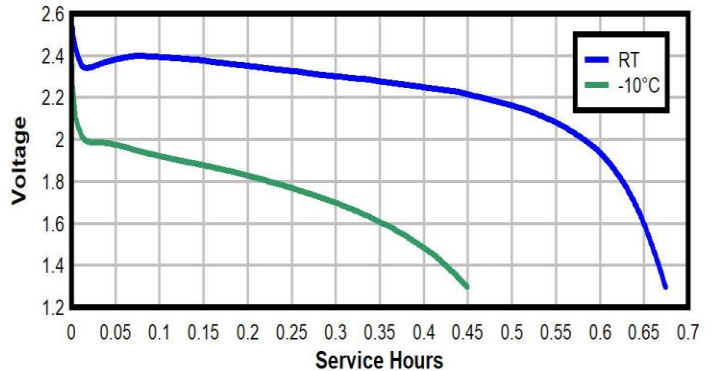

Continuous Load Discharge



Delivered Energy vs. Power Drain  
@ Various Cutoff Voltage - Room Temperature

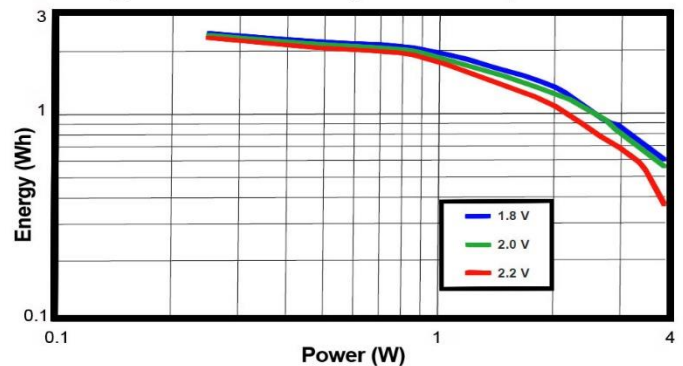

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

60086-4 © IEC:2007 Edition 3.0

Warning

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

Fire, explosion and burn hazard

Do not recharge, short circuit, crush, disassemble, heat above 100 °C (212 °F), incinerate, or expose contents to water

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.