


### PERMANENT MOUNT

Wireless Hand-Held Remote  
20004 (white) 20514 (black)


Hard-Wired Dash Mount Remote  
20204 (white) 20214 (black)



Wireless Hand-Held &  
Wireless Dash-Mount Remotes  
20074 (white) 20574 (black)

### PORTABLE MODELS

Suction Cup & Permanent Shoe  
Wired Remote - 51494 (charcoal)  
Wireless Remote - 79004 (white)




### PORTABLE MODELS

Suction Cup & Magnetic Shoe  
Wireless Hand-Held Remote  
79014 (white) 79514 (black)



Golight RadioRay LED  
Light Beam Dimensions

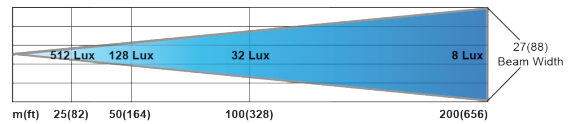


Illuminance (Lux) 512 128 32 8

Peak Beam Intensity: 320,000 Candela

Maximum Beam Distance: 1,131 m / 3,711 ft

Beam Angle: 8°

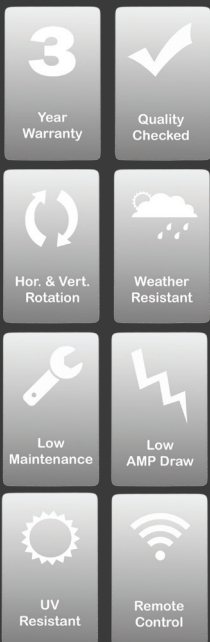

<b>Housing:</b>	Heat resistant and high impact injection molded housing
	ASA Polymer (white housing) ABS Polymer (black housing)
<b>Parts:</b>	Nylon, Acetal Rack O-ring, Stainless Steel pinion drive
	15' 18G cord with universal cigarette lighter plug
<b>Fasteners:</b>	Stainless Steel
<b>Motors:</b>	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.333mN.m/amp, Stall: 12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
<b>Quality and Type of LED's:</b>	10 High Flux LED's
	P-Vex lens technology
	8° beam angle
	Anodized Aluminum heat sink w/liquid powder-cast finish
<b>Peak Beam Intensity:</b>	320,000 Candela
<b>Max Beam Distance:</b>	3,711 ft
<b>Voltage DC:</b>	12V
<b>Power Consumption:</b>	40W
<b>Max Current Draw:</b>	3 amps
<b>Wireless Remote Control:</b>	Radio Frequency: 433 MHz
	> 2000 possible address codes with 7 station dip switch
	Transmitter power: 2 Duracell MN21 12v batteries
	Radio Frequency allows for remote operation up to 80 feet away
<b>Hardwired Dash Mount Remote:</b>	On/Off switch, 4 way toggle
	20' of six wire cord
<b>Warranty:</b>	3 Year Limited Warranty
<b>Mounting Options:</b>	Permanent Mount, Portable Light/Magnetic Shoe, Portable Light/Permanent Shoe
<b>Rockguard:</b>	Not Available for LED Models