



North American Headquarters
 601 Rayovac Drive
 Madison, WI 53711
 Telephone 1-800-331-4522
 Internet www.rayovac.com

Marketing Data Sheet - Batteries

S6600182
 Issue F
 Memo No: [MDSR0104](#)

Rayovac Stock Number: **803**

Name: **803 ALKALINE**

ENGINEERING DATA:

Cell Chemistry: Alkaline

Designation: ANSI/NEDA – 903A

Nominal Voltage: 7.5 volts

Approximate Weight: 5.6 Lb (2.55 Kg)

Approximate Volume: 108 CU IN (1770 CU CM)


Operating Temp. Range: -30° C to 55° C (-20° F to 130° F)

Terminals: Screw

Shell: Steel

Number Of Cells: 15

Environmental: Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal.
 No Mercury Added Formulation
[Rayovac Material Safety Sheets](#)

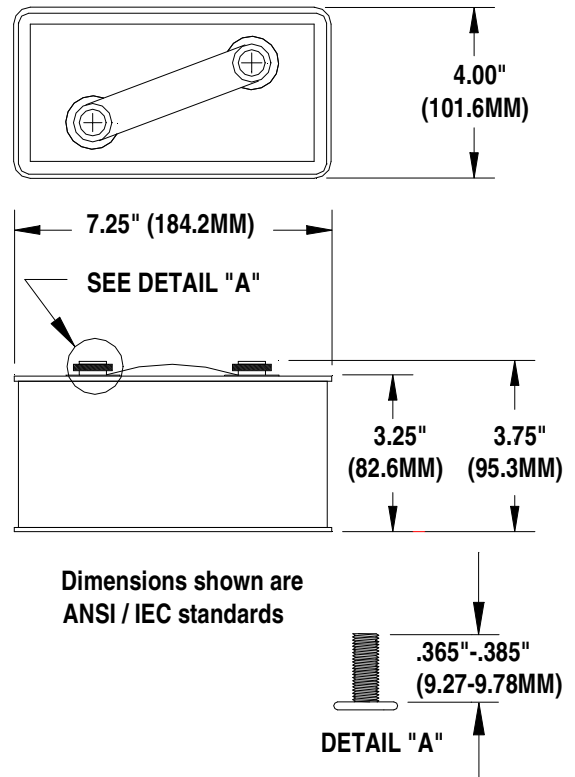

**TYPICAL INITIAL SERVICE AT 70°F (HOURS)
 CUTOFF VOLTAGE**

<u>DUTY CYCLE</u>	<u>LOAD (OHMS)</u>	<u>CURRENT (AMPS AT 6V)</u>	<u>CUTOFF VOLTAGE</u>				<u>mAh CAPACITY To 4.5V</u>
			<u>6.0V</u>	<u>5.5V</u>	<u>5.0V</u>	<u>4.5V</u>	
30 MIN/HR (8 HRS/DAY)	10	.75	32	54	62	69	40,000
30 MIN/HR (8 HR/DAY)	2.7	2.22	2.1	6.0	11.2	15.9	31,700
24 HR/DAY	2.46	2.44	1.5	4.8	10.7	13.1	29,000

950728

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.