



North American Headquarters
 601 Rayovac Drive
 Madison, WI 53711
 Telephone 1-800-331-4522
 Internet www.rayovac.com

Marketing Data Sheet - Batteries

S6600183
 Issue G
 Memo No: [MDSR0104](#)

Rayovac Stock Number: **806**

Name: **806 ALKALINE**

ENGINEERING DATA:

Cell Chemistry: Alkaline

Designation: ANSI/NEDA – 908A

Nominal Voltage: 6 volts

Approximate Weight: 1 Lb 6 Oz (.62 Kg)


Approximate Volume: 32 CU IN (524.4 CU CM)

Operating Temp. Range: -30° C to 55° C (-20° F to 130° F)

Terminals: Spring

Shell: Steel

Environmental: Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal.
 No Mercury Added Formulation
[Rayovac Material Safety Sheets](#)

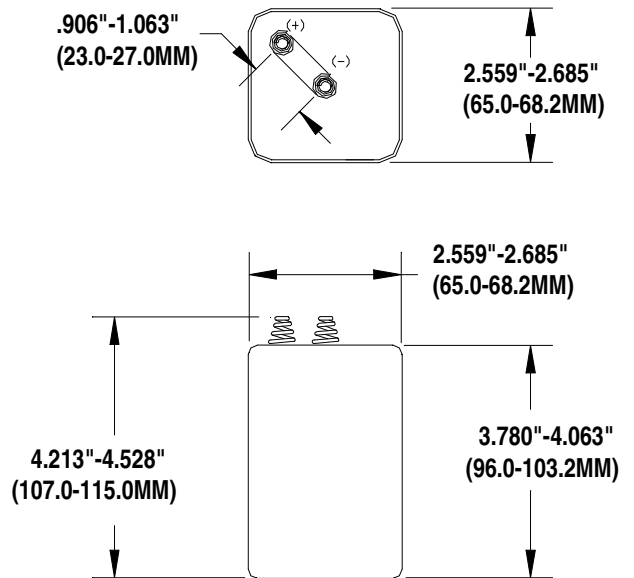

Dimensions shown are ANSI / IEC standards

TYPICAL INITIAL SERVICE AT 70°F (HOURS)
CUTOFF VOLTAGE

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA at 4.8V)	CUTOFF VOLTAGE					MAh CAPACITY To 3.6V
			4.4V	4.0V	3.6V	3.0V	2.6V	
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	6.8	705	8.4	13.9	17.2	20.6	21.3	11,148
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	9.1	527	16.0	20.8	24.4	28.7	29.5	12,249
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	33	145	83.1	92.6	104.7	-	-	15,379
STEADY BURN BARRICADE (12 HR/DAY)	110	44	295	336	380	442	-	17,109

952277

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.