

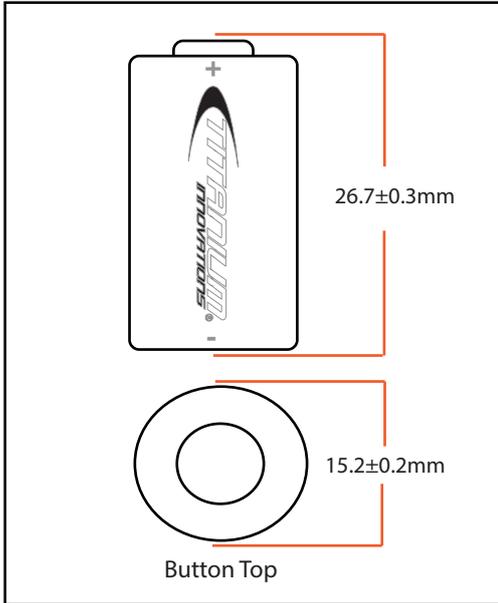
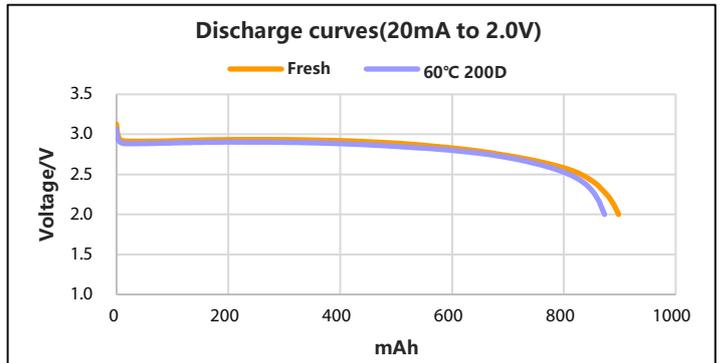
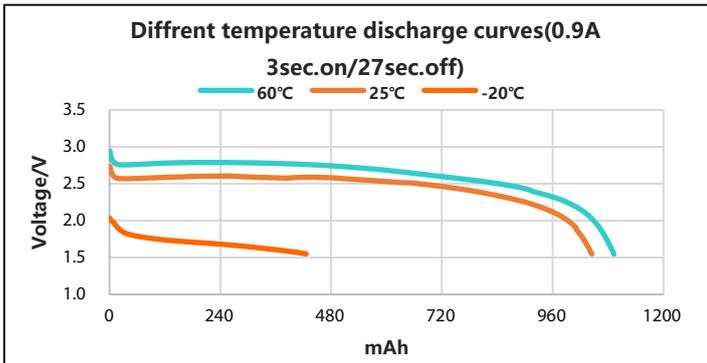


**Specifications:**

This document describes the product specification of C2 + PTC battery supplied by Titanium Innovations, Inc. and contains information specific to products manufactured at the time of its publication.

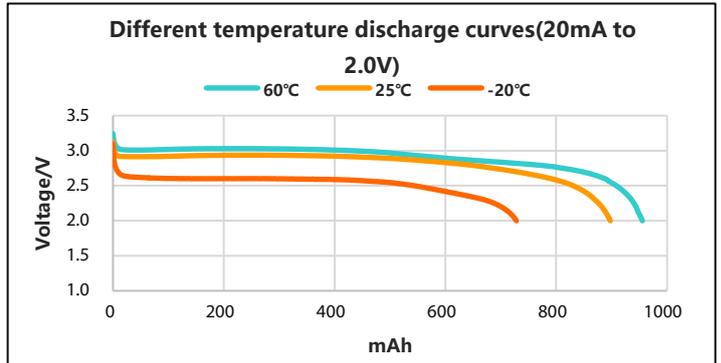

Nominal Voltage		3.0V
Dimensions (Max.)	Diameter	15.5mm
	Height	27.0mm
Weight		11.0g
Nominal Capacity (Avg.)		1000mAh
Continuous Standard Load		1mA
Cut-off Voltage		2.0V
Max. Continuous Discharge Current		800mA
Max. Pulse Discharge Current		1500mA
Operating Temperature		- 40°C ~ + 70°C

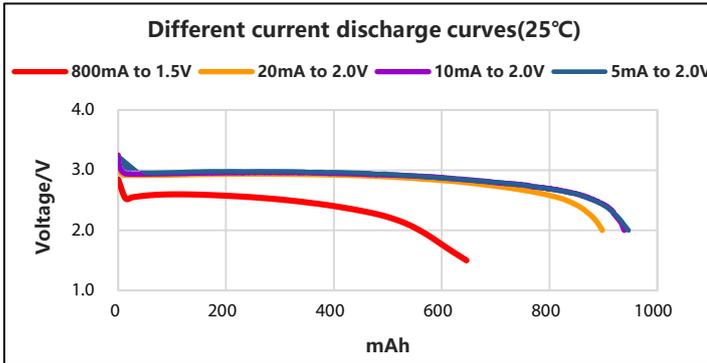

**WARNING:**

Keep out of reach of children. Contact a physician or poison control if swallowed. May explode, catch fire, or leak causing injury and damage if disassembled, crushed, inserted backwards, recharged, mixed with different battery types or brands, exposed to fire, or operated at temperatures above 212°F (100°C). Store in a cool, dry place. Recycle or dispose of exhausted batteries properly.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice.