


# ULTRALIFE<sup>®</sup>Batteries

# We. Are. Power.<sup>™</sup>

## U9VLX Technical Datasheet

### The Ultralife Advantage

Better technology. Our battery & charging technologies and power systems enable us to design leading-edge solutions for the world's most demanding applications.

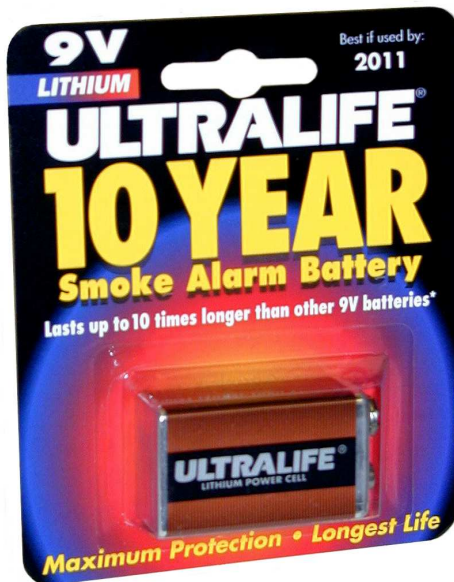

### SPECIFICATIONS

Part No	U9VLX
Voltage Range	5.4 to 9.9 V
Average Voltage	9.0 V
Nominal Capacity	1.2 Ah @ 9 mA to 5.4 V @ 23°C
Max. Discharge	120 mA continuous
Pulse Capability	Up to 400 mA Varies according to pulse characteristics, temperature, cell history and the application. Consult Ultralife.
Weight	36.4 grams
Operating Temp	-20°C to 60°C
Storage Temp	-40°C to 60°C
Self-Discharge	< 0.16% per month at 23°C
Exterior/Housing	Aluminum / Mylar Label
Terminals/Connector	Ni-plated Miniature Snap
Safety	Recognized under the Component Program of Underwriters Laboratories, Inc. Material Safety Datasheet – MSDS001.
Transportation	Excepted from Regulations – see note 1

### FEATURES


- High energy density
- 10-year service life
- Flat discharge voltage curve
- Wide operating temperature range
- Lightweight
- Lasts up to 5X longer than ordinary 9V alkaline batteries
- Lasts up to 10X longer than carbon-zinc batteries

### APPLICATIONS

- Smoke Alarms
- Carbon-Monoxide Detectors
- Wireless Security Devices
- Medical Devices
- Music/Audio Devices
- Instrumentation

<b>Note 1</b>	For a complete description of transportation regulations and definitions of the transportation classifications "Excepted" and "Class 9," refer to the Ultralife web site at <a href="http://www.ultralifebatteries.com">www.ultralifebatteries.com</a> .
<b>Note 2</b>	NEDA number is 1604 LC
<b>Note 3</b>	Sold in 48 count boxes. Call for other options.

**DIMENSIONS**

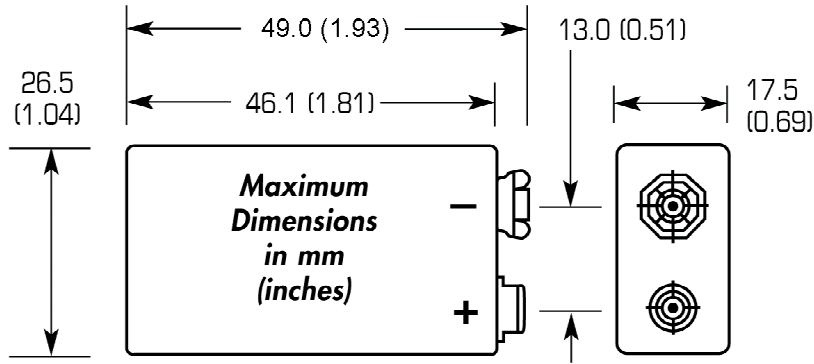

**PERFORMANCE GRAPHS**

