
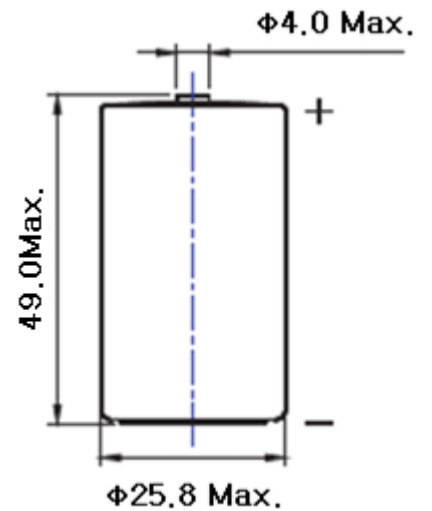


## SPECIFICATIONS

(Typical values stored at 20°C for one year)

◆ Nominal capacity (at 3mA/20°C/68°F/2.0V cut-off)	8.5Ah
◆ Nominal voltage	3.6V
◆ Max. recommended continuous current (Higher current can be available upon consulting)	150mA
◆ Max. pulse current capability ★	230mA
◆ Operating temperature range	-55 ~+85°C
◆ Lithium metal content	approx. 2.3g
◆ Weight	50g
◆ Volume	26cm <sup>3</sup>
◆ UL Approval	MH28122

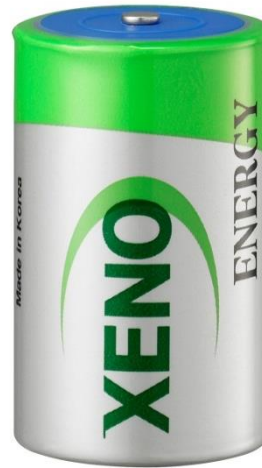

Dimensions in mm

**Available Terminal Type**  
STD, T1, AX, Wire, Connector

### Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

**Max Pulse Capability:** Maximum Pulse capability reading over 3.0V at 230mA/0.1sec. every 2 min. at +20°C, 10μA/cm<sup>2</sup> base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

