

Smoke Detector Battery Installation – SMC SM01/02-Z

What You'll Need

- SMCCM01-Z or SMCCM02-Z Smoke Detector
- Two CR123A batteries

How to Install the Batteries

Before proceeding, please be sure that your system is disarmed and in [Test mode](#). Working on devices while the system is armed can generate false alarms.

Did You Know? Removing batteries without putting the system in Test mode could trigger an alarm, dispatch police/fire assistance, and may result in a fine for a false alarm.

Is This Your Smoke Detector? Make sure that your Smoke Detector looks like the one in the image. If it does, you have the right document to find out how to install a battery in your Smoke Detector.




1. Put your system in [Test mode](#).
2. If you have removed the Smoke Detector from the wall/ceiling, turn the cover of the Smoke Detector until the alignment arrow on the cover points to the tab on the Smoke Detector's body.

If the device is still attached to the wall/ceiling, hold the top of the Smoke Detector, and turn it counterclockwise until it stops.



3. Pull the body of the Smoke Detector away from the cover. If you have left the device attached to the wall/ceiling, the cover will remain attached once you've pulled the Detector away.

Take a Look. If a battery is already present, remove it by gently pulling the end of the ribbon up until the battery is loose. Then, you can pull it free from the battery slot.

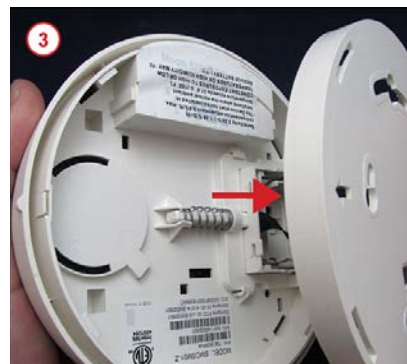

4. Pull back the spring-loaded battery slide.
5. The battery compartment contains a diagram of the proper battery position with a symbol indicating which way the positive (+) end of the battery should be facing.

Insert the two CR123A batteries over the ribbon in the slots, positioning the positive (+) ends of the batteries as shown in the battery diagram.



6. When the batteries are inserted correctly, a red indicator light will light up.



7. If you have removed the Smoke Detector from the wall/ceiling, line up the alignment arrow with the tab on the body of the Smoke Detector and turn the cover clockwise until it snaps into place. Remount it to the wall/ceiling.
8. If the cover is still attached to the wall/ceiling, place the body of the Smoke Detector over the cover and turn it clockwise until it snaps into place.

Did You Know? You should take the opportunity to clean the sensor when you have the Smoke Detector removed from its mount. Clean the front and back of the Smoke Detector with a dry or damp (water only) cloth.



Confirm that the low battery alert has resolved and the equipment appears on your list of connected devices.

Need Help? Find these instructions online at <https://www.xfinity.com/support/home-security/installing-battery-smcsm01-z-smoke-detector/> or <https://www.xfinity.com/support/home-security/installing-battery-smcsm02-z-smoke-detector/>. Get more troubleshooting support at <https://www.xfinity.com/support/gettingstarted/troubleshooting/> or contact a customer service expert at 1-800-XFINITY.

Help Protect Our Environment: Please properly recycle your discarded batteries. For your convenience, batteries are accepted for recycling at various locations. Check www.call2recycle.org or call 1-800-8-Battery (1-800-8-228-8379) to find a recycling location near you.