


Constant Output Performance

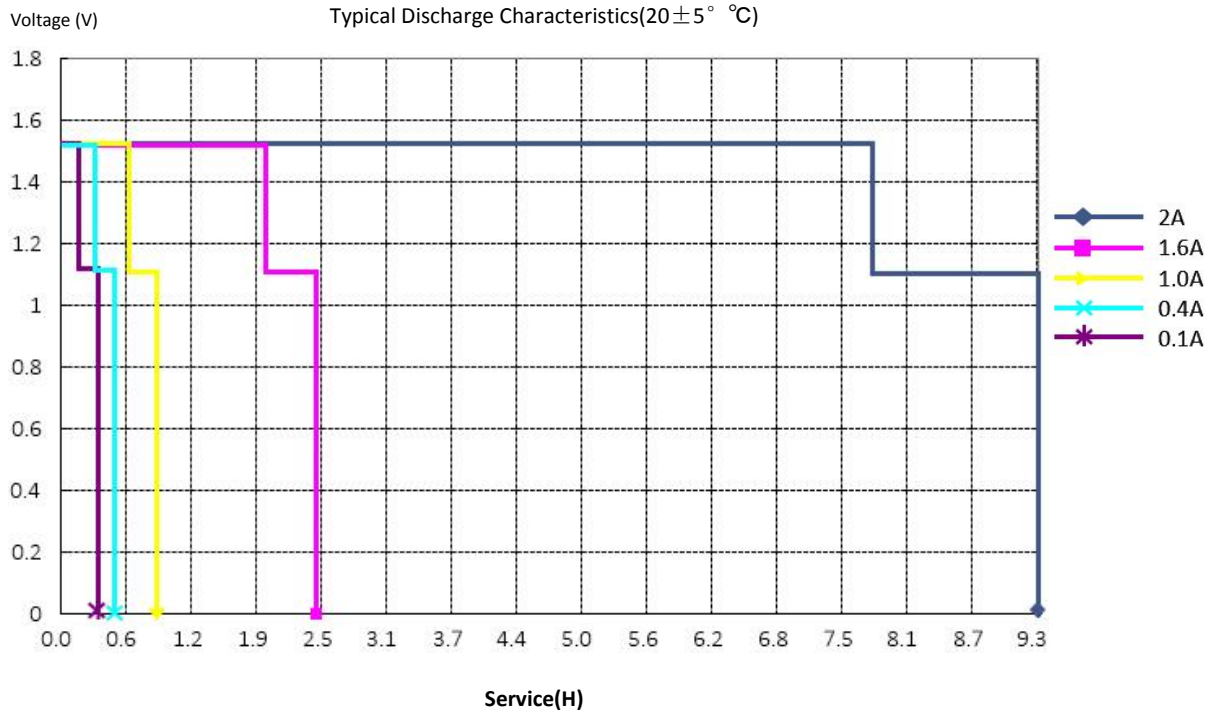

Charging Current Diagram





Voltage (V) /Current (mA)x 100

Input power 18W by XTAR L8 charger

Temp. (°C)

Charging Time (H)

Application Tests

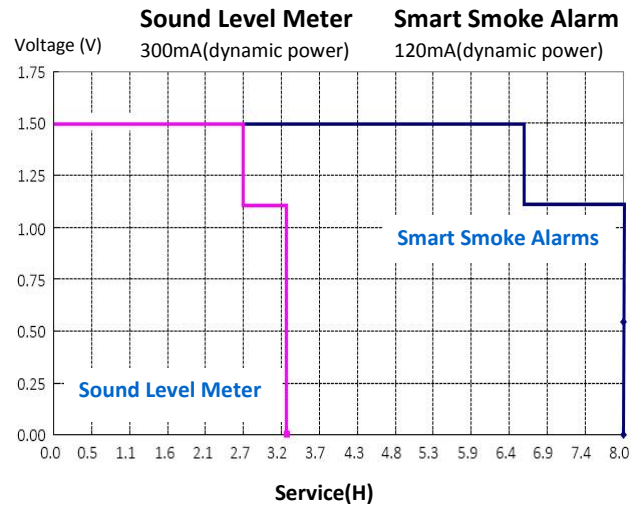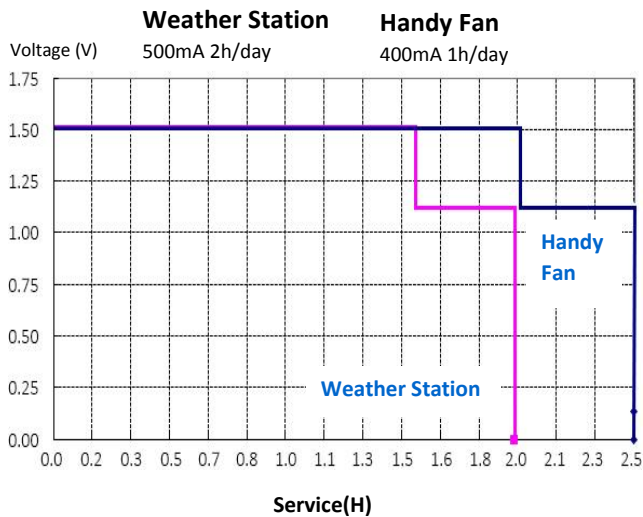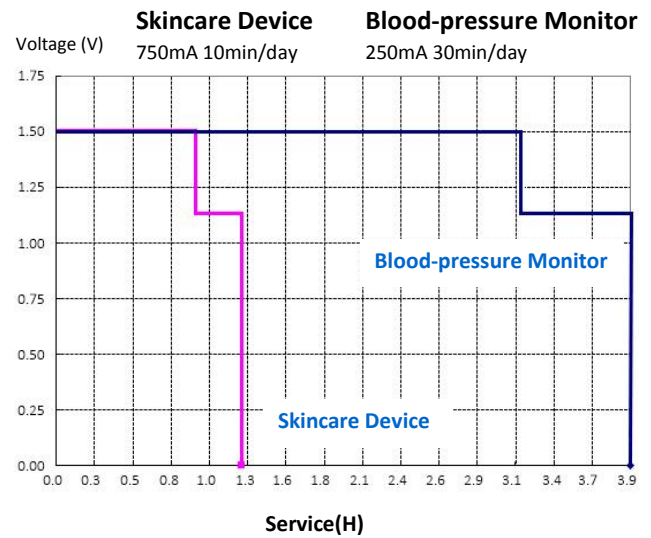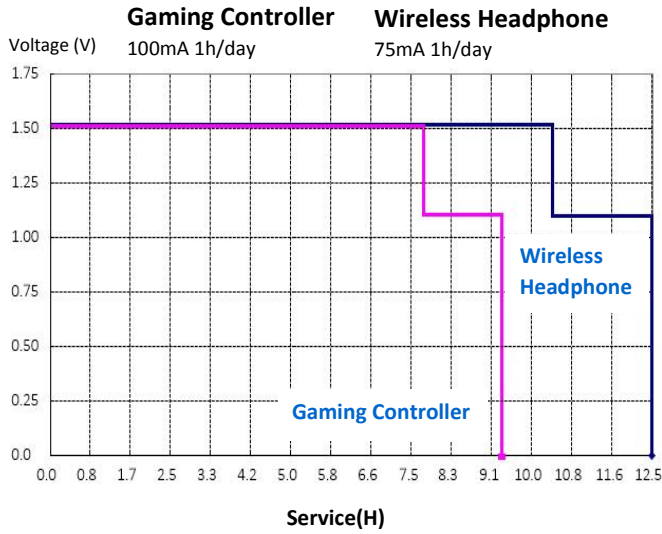

Battery LED Indicator Status Table

Battery Status	LED Indicator Status
In the charging	1HZ flash
Charge complete	LED on
No battery	High flash
In the discharging	LED off
Discharge short circuit	10HZ high flash
Discharge low voltage	Blink at 1HZ for eight times, and then off

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©XTAR - All Rights Reserved