

T2

说明书


(CHS) 简体中文

+86-0755-26809357

service@thrunite.com

http://www.thrunite.com

广东省深圳市宝安区西乡宝源路168号
名优采购中心A栋640室

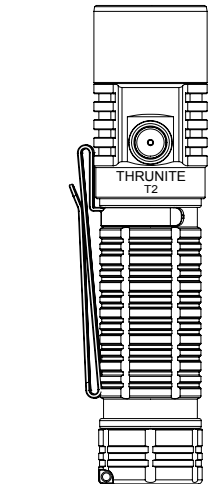

T2

User Manual

(EN) English

+86-0755-26809357

service@thrunite.com

http://www.thrunite.com

Room 640, Tower A,
NO.168 Baoyuan Road, Xixiang,
Baoan, Shenzhen 518102, China

T2 充电式LED手电采用最新的CREE XHP70灯珠，最大流明可达3757流明，最大射程可达158米。

规格参数

机械参数								
LED灯珠	光镜	光杯	工作电压	材质	表面处理	尺寸	重量	
XHP70	镀膜增透钢化玻璃	橘皮	2.7V-8.4V	AL T6061-T6	三级硬氧	112mm*30.5mm*26mm	裸机87g	
配件	手电套 *1, 防水圈 *2, 手绳 *1, THRUNITE 5000mAh 21700电池 *1, USB充电线 *1, USB胶塞 *1, 抱夹 *1。							
ANSI/NEMA FL1参数								
	照明模式							
	极亮档	高亮档	中亮档	低亮档	月光档	爆闪模式		
档位亮度	3757 流明	725 流明	1712 流明	732 流明	366 流明	30 流明	0.3 流明	1450 流明
续航时间	2 分钟 + 216 分钟		3 分钟 + 223 分钟		7.5 小时	77 小时	69 天	5 小时
最大射程	158米							
最大光强	6300坎德拉							
防跌落等级	1.5米							
防水等级	IPX-8 水下2米							

注：上述参数只是一个近似值，以THRUNITE 5000mAh 21700电池在实验环境中测试所得，可能会随着手电， 电池和使用环境而发生变化。

电量指示灯

电量等级	1 – 10%	11 – 20%	21 – 100%
指示灯状态	红闪	红灯常亮	蓝灯常亮
电压	2.7V – 2.9V	2.9V – 3.1V	3.1V – 4.2V

注意：月光模式下指示灯不亮。

操作说明

锁机与解锁

在锁机状态下，长按侧开关手电解锁。
在关机状态下，长按侧开关进入月光模式，再次长按侧开关锁机。

手电开关

手电解锁后，轻触侧开关即可点亮手电（记忆关机后的任意一个模式，月光、极亮和爆闪除外）。

模式切换

单击侧开关进入记忆档位后，长按侧开关即可循环三个不同的模式（低亮-中亮-高亮）。
快捷方式到月光档：手电关闭状态时，长按侧开关即可进入月光档。
任何模式双击侧开关进入极亮档。三击侧开关进入爆闪模式。

充放电功能

USB 2A充电。充电中指示灯亮红色，充满后亮蓝色，紫灯闪烁代表充电异常。
充电时仅可以使用月光、低亮档位。

保修条款

- 2年免费包换：THRUNITE产品自出售之日起2年内，用户在正常使用情况下，出现产品质量问题，则享受2年免费包换。
- 30天无条件退款。
- 终身有限保修：在超过2年免费包换时间外，THRUNITE公司将提供有偿保修，费用以实际更换材料费用为准，不另收取人工费用。

警示

- THRUNITE手电亮度高，请勿直视发光体，以免造成视力损伤。
- 请远离儿童防止其误食。
- 为了保护电池，电路板以及LED灯珠，我们建议操作极亮模式不要超过10分钟。

RoHS FC CE X

T2 rechargeable LED flashlight adopts the CREE XHP70 LED to make output up to 3757 lumens and max beam distance of 158 meters.

Specifications

Technical Parameters							
LED	Lens	Reflector	Working Voltage	Material	Surface Finish	Dimension	Weight
XHP70	Anti-reflective coated ultra-clear toughened glass lens	Orange Peel	2.7V-8.4V	AL T6061-T6	Premium type III hard-anodized	112mm*30.5mm *26mm	87g (battery excluded)
Accessories	Holster *1, Spare O-rings *2, Lanyard *1, THRUNITE 21700 battery *1, USB type-C Charging Cable *1, Spare USB Rubber Cover *1, Dual-direction Clip *1						
ANSI/NEMA FL1 Parameters							
	General Mode						
	Turbo	High	Medium	Low	Firefly	Strobe	
Output	3757 lumens 725 lumens	1712 lumens 732 lumens	366 lumens	30 lumens	0.3 lumens	1450 lumens	
Run time	2 mins + 216 mins	3 mins + 223 mins	7.5 hrs	77 hrs	69 days	5 hrs	
Distance	158 meters (max.)						
Intensity	6300 cd (max.)						
Impact Resistance	1.5 meter						
Waterproof	IPX-8 (2M)						

Notes: The above parameters tested by one THRUNITE 5000mAh 21700 battery are approximate and may vary between lights, batteries and environment.

Indicator

Power Capacity	1 - 10%	11 - 20%	21 - 100%
Indicator	Flashing red	Red	Blue
Voltage	2.7V - 2.9V	2.9V - 3.1V	3.1V - 4.2V

Note: The indicator will be OFF in firefly mode.

Operation

Lock/Unlock

Under the lockout mode, press and hold the side switch to unlock the flashlight.
When the flashlight is off, press and hold the side switch to enter firefly mode. Under firefly mode, press and hold the side switch to access the lockout mode.

Turn ON/OFF

After the light is unlocked, press the side switch to turn the light on/off. The light will turn on in the last mode used, except firefly, turbo and strobe.

Change Modes

Single click the side switch to the last mode used, then press and hold the side switch to cycle through low, medium and high.
Shortcut to firefly: When the light is off, press and hold the side switch to get firefly mode.
Double click to turn to turbo from any mode. Triple click to get strobe.

Rechargeable Function

2A charging by USB port. During charging, the indicator is RED. After being fully charged, the indicator will be BLUE. When indicator flashes purple, it means abnormal charging. Only firefly, low modes are available while charging.

Warranty

- 2-years free replacement: We will offer free replacement within 2 years of purchase if problems develop with normal use.
- 30-days refund by Amazon: You may return most new, unopened items sold and fulfilled by Amazon within 30 days of delivery for a full refund.
- Lifetime limited maintenance: As to those exceed 2 years of the purchase date, we will still provide with maintenance service, but the cost of parts will be charged and freight should be paid by customers.

Warnings

- THRUNITE flashlights are high-intensity lighting devices capable of causing eye damage or other harms, so please avoid shining our light directly into anyone's eyes.
- Please keep flashlights away from children.
- To protect the battery, driver circuit and LED, we Do NOT recommend you run the light at max mode more than ten minutes.

RoHS FC CE X

RoHS FC CE 